


11-01-04

9200/3683

DAC #13
DW

PATENT
10191/1975



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

By re Application of : Harald BECK et al.
Serial No. : 09/965,776
Filing Date : September 27, 2001
For : METHOD AND DEVICE FOR CONTROLLING A
WHEEL BRAKE OF A VEHICLE
Examiner : Robert SICONOLFI
Art Unit : 3683
Confirmation No. : 3434

RECEIVED
NOV 5 2004
GROUP 3600

Mail Stop Petitions
Commissioner for Patents
P. O. Box 1450
Alexandria, VA. 22313-1450

**PETITION TO WITHDRAW HOLDING OF ABANDONMENT
DUE TO PATENT OFFICE ERROR UNDER 37 C.F.R. 1.181(a)**

SIR:

Applicants hereby petition to have the Notice of Abandonment, dated October 19, 2004, received in the above-identified patent application withdrawn due to an error on the part of the Patent Office. The Notice of Abandonment indicates that Applicants failed to timely file a Response to the Office Action mailed October 10, 2003.

In response to the Office Action mailed October 10, 2003, Applicants timely filed on December 8, 2003, a Request For Reconsideration (Exhibit A). Also a Notice of Appeal (Exhibit B) with a request for a one month extension of time was timely filed on February 12, 2004. Thereafter, an Appeal Brief (Exhibit C) and request for a one month extension of time was mailed on May 11, 2004 and received by the Patent Office on May 13, 2004.

EJ17035227645

We are enclosing herewith copies of the above noted exhibits.


As this petition was necessitated by Patent Office error, no fee is believed to be required. However, if any fee is required, the Commissioner is authorized to charge Deposit Account No. 11-0600. A copy of this petition is enclosed for that purpose.

Respectfully submitted,

Dated:

10/28/04

By:

By Richard L. Mayer, Reg. No. 22,490

Richard L. Mayer, Reg. No. 22,490

KENYON & KENYON

One Broadway

New York, New York 10004

Telephone: (212) 425-7200

Facsimile: (212) 425-5288

Customer No. 26646

Exhibit A

RECEIVED

NOV 5 2004

GROUP 3600

Case No. 101911975

Atty. [Signature]

Ser. No. 091965776

Due Date 12/4/2003

The Impressed Mail Room date stamp acknowledges receipt of the date indicated of:

☐ Application

☒ Amendment AF

☐ Assignment

☐ Notice of Appeal

☐ Prior Art Statement

☐ Appeal Brief

☐ Extension Request

☐ Priority Document

☐ Issue Fee

☐ Declaration

☐ Small Entity

☒ Deposit #11-0602



[10191/1975]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Harald BECK et al.
Serial No. : 09/965,776
Filed : September 27, 2001
For : METHOD AND DEVICE FOR CONTROLLING A WHEEL
BRAKE OF A MOTOR VEHICLE

Art Unit : 3683

Examiner : Robert SICONOLFI

Mail Stop AF
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

I hereby certify that this correspondence is being deposited with the
United States Postal Service with sufficient postage as first class mail
in an envelope addressed to:
Mail Stop AF
Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450
on

Date 4 Dec 2003 Atty's Reg. # 33,098

Atty's Signature

MICHELLE M. CARNIAUX
KENYON & KENYON

REQUEST FOR RECONSIDERATION TRANSMITTAL

SIR:

Please find a Request For Reconsideration transmitted herewith for filing in the
above-identified patent application.

No fee is believed to be required. However, if any fee is required, please use
Deposit Account No. 11-0600. A duplicate copy of this transmittal letter is enclosed for that
purpose.

Respectfully submitted,

KENYON & KENYON

Dated: 4 Dec 2003

By:

Richard L. Mayer
Reg. No. 22,490
One Broadway
New York, NY 10004
(212) 425-7200
CUSTOMER NO. 26646

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s) : Harald BECK et al.
 Serial No. : 09/965,776
 Filed : September 27, 2001
 For : METHOD AND DEVICE FOR CONTROLLING A WHEEL
 BRAKE OF A MOTOR VEHICLE
 Art Unit : 3683
 Examiner : Robert SICONOLFI

MAIL STOP AF
 Commissioner for Patents
 P.O. Box 1450
 Alexandria, VA 22313-1450

I hereby certify that this correspondence is being deposited with the
 United States Postal Service with sufficient postage as first class mail
 in an envelope addressed to:
 Mail Stop AF
 Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450
 on

Date 4 Dec 2003 Atty's Reg. # 36,098

Atty's Signature

REQUEST FOR RECONSIDERATION
MICHELLE M. CARVIAUX
 KENYON & KENYON

SIR:

This paper addresses the Final Office Action of October 10, 2003. Reconsideration of the present application is requested in view of the following.

REMARKS**I. INTRODUCTION**

Claims 1, 3, 5, 7, 8 and 10 are pending in the present application. Reconsideration of the present application is requested in view of the following remarks.

II. REJECTION OF CLAIMS 1, 3, 7, 8 AND 10 UNDER 35 U.S.C. § 102(b)

Claims 1, 3, 7, 8 and 10 stand finally rejected under 35 U.S.C. § 102(b) as being anticipated by U.S. Patent No. 6,053,584 to Schunck et al. (Schunck). It is respectfully submitted that none of claims 1, 3, 7, 8 and 10 is anticipated by Schunck, for at least the following reasons.

In response to the comments made in the Response to Arguments section of the Final Office Action, it is noted that regardless of whether Schunck refers to a standstill condition as a

triggering factor, it does not disclose limiting the application of a braking force or pressure to a maximal value when the vehicle is at a standstill as recited in claim 1.

The Schunck reference relates to a technique of reducing sudden changes in deceleration when coming to a standstill whereby a control system overrides a driver's braking commands and implements a progressive diminution in brake pressure so that the deceleration drops monotonously from an initial level to lower levels. See Schunck, col. 3, lines 28-35. An exemplary use of this technique is illustrated in the graphs of Fig. 4b which shows (at the dotted lines), the effect of the technique in gradually and progressively reducing the pressure (PRADi) after time T1, at which the speed of the vehicle falls below a threshold velocity VREFSS.

The above-described technique of Schunck differs from the method recited in claim 1 in that Schunck does not describe setting an upper limit on the pressure applied to the vehicle when the vehicle is at a standstill. A comparison of Figs. 3a to 3c of the present invention with Figs. 4a to 4d of Schunck provides a clear illustration of this difference. Even if one were to equate the threshold condition (VREFSS) of Schunck with a standstill condition along the lines suggested by the Examiner – which is not admitted, but merely addressed for illustrative purposes – at the point where the respective threshold conditions are met, the outcome is different. In Schunck, at the point where the threshold condition is met, T1, the pressure (in Fig. 4b) begins to drop progressively according to a profile calculated to produce a monotonic drop in deceleration (see Fig. 4d). According to the present invention, at the threshold condition (standstill) at time T0, the pressure (PRAD, shown in Fig. 3c) drops precipitously from the setpoint pressure determined from the driver's input (PRADSOLLFW) to the upper limit, maximal pressure (PRADSOLLGRENZ). Thus, while Schunck prescribes a progressive, monotonic pressure decrease once the threshold condition is met (in order to prevent a large deceleration), the present invention according to claim 1 calls for an upper limit on the pressure so that, for example, the pressure immediately drops from the setpoint to the maximal pressure to prevent excessive application of braking force when not necessary.

For the foregoing reasons, it is submitted that Schunck does not disclose the features of claim 1, which is, therefore, not anticipated by the Schunck reference.

Claims 3, 7 and 8 depend from claim 1. Accordingly, the arguments presented above in connection with Schunck and claim 1 apply equally to claims 3, 7 and 8.

Since independent claim 10 recites features analogous to those discussed above of claim 1, it is patentable over Schunck for at least the same reasons given above with respect to claim 1.

Accordingly, it is respectfully submitted that claims 1, 3, 7, 8 and 10 are patentable over Schunck, and withdrawal of the rejection is, therefore, requested.

III. REJECTION OF CLAIMS 1, 3, 5, 7, 8 AND 10 UNDER 35 U.S.C. § 103

Claims 1, 3, 5, 7, 8, and 10 stand finally rejected under 35 U.S.C. § 102(e) as being anticipated by U.S. Patent No. 6,332,654 to Yano (Yano). It is submitted that none of claims 1, 3, 5, 7, 8, and 10 are anticipated by Yano, for at least the following reasons.

In the Response to Arguments section of the Final Office Action, it is asserted that Yano uses a target pressure as a maximum brake pressure and that if the pressure is exceeded, the brake pressure is reduced and thereby limited. The Final Office Action cites item 1207 of Figure 12 of the Yano reference in support of this assertion. For the following reasons, it is respectfully submitted that Yano does not disclose limiting the application of a braking force or pressure to a maximal value when the vehicle is at a standstill as recited in claim 1.

Yano relates to a grade-holding brake system used for maintaining a brake pressure and a stopped condition after release of the brake pedal. See e.g., Yano, Abstract. Yano describes the details of an embodiment of this system in Figs. 9, 10, 11 and 12 and the accompanying text (col. 9, line 50 to col. 12, line 7). With respect to Fig 12, item 1207 refers to a “pressure decreasing operation”. As indicated in Fig. 12, this pressure decreasing operation is performed when a Ycntrl flag is set, an absolute value of a ZdP parameter is not less than an XdP parameter, and the ZdP parameter is not greater than zero. The accompanying text explains that step 1207 involves several sub-steps shown in Fig. 13C which include: holding a cut-off valve in a closed position for a predetermined period of time (thereby maintaining the pressure at the wheel brake cylinders for a predetermined period of time, since by having the cut-off valve closed, fluid cannot flow back away from the wheel brakes; opening the cut-off valve, closing the pressure booster valve; and turning the pressure booster pump off. See Yano, col. 11, lines 25-32. In this manner, Yano states, “it is possible to appropriately compensate for the pressure deviation [between the actual and target pressure levels]”. Yano describes in an immediately preceding passage a converse pressure increasing process used when the actual pressure is lower than the target pressure in which the cut-off valve is similarly held closed for a predetermined period of time, but then the pressure booster valve is opened and the pressure booster pump is turned on for a predetermined period of time. Yano, col. 11, lines 9-15. With respect to this latter process, it is stated that “if the predetermined periods of time for controlling the pressure booster valve and . . . pump are set at values corresponding to the

pressure deviation ZdP, it is possible to appropriately compensate for the pressure deviation.” Yano, col. 11, lines 16-20.

From these passages, it is clear that Yano discloses an adjustment mechanism to either *decrease or raise* brake pressure to a target level over time when the vehicle has come to rest. What is significant here is that there is absolutely no disclosure as to providing an upper limit or maximal pressure in the case of a standstill to, for example, prevent excessive and unnecessary loading. In fact, Yano never refers to this objective, and thus merely describes stipulating a target pressure and using a valve system adjust the brake pressure to within a small deviation from the target pressure over time. In this context, it is emphasized that simply because an electronic brake control system may adjust actual brake pressure to a target level in a given context – which may involve decreasing the brake pressure if it is determined that the actual brake pressure is increasing beyond the range of the target level – this is not the same as prescribing the target as an upper limit for the actual pressure. In anticipation of the view the Examiner may take that prescribing a range automatically entails prescribing an upper limit or ceiling, Applicants note that these are not the same, because there is no disclosure (or suggestion) in Yano that the target pressure level is itself limited to an upper value, only a brief indication that the target level may optionally represent a level sufficient to maintain the vehicle at rest.¹

For at least these reasons, it is respectfully submitted that independent claim 1 its dependent claims 3, 5, 7, 8 and independent claim 10 are not anticipated by Yano. Withdrawal of the rejection of the claims based on the Yano reference is, therefore, respectfully requested.

¹Yano states that the target pressure is “*preferably* of a value sufficient to keep the stopping condition of the vehicle. Yano, col. 10, lines 22-24 (emphasis added). There is no disclosure or suggestion that the target pressure represents an upper threshold or limit beyond which unnecessary loading occurs.

IV. CONCLUSION

Each of the issues raised by the Examiner has been addressed. It is respectfully submitted that all pending claims (1, 3, 5, 7, 8 and 10) are in condition for allowance. Passage to issuance is requested.

Respectfully Submitted,

KENYON & KENYON

Dated: 11 Dec 2003

By: 

Richard L. Mayer
(Reg. No. 22,490)

One Broadway
New York, NY 10004
(212) 425-7200

CUSTOMER NO. 26646

Exhibit B



RECEIVED

NOV 5 2004

GROUP 3600

P35466US

Case No. 10191/1975 Atty. RLM
Ser. No. 09/965,776 Date 2/10/04

The Impressed Mail Room date stamp acknowledges receipt of the date indicated of:

- ☐ Application
- ☐ Amendment
- ☐ Assignment
- ☒ Notice of Appeal
- ☐ Prior Art Statement
- ☐ Appeal Brief

- ☒ Extension Request
- ☐ Priority Document
- ☐ Issue Fee
- ☐ Declaration
- ☐ Small Entity



☒ Deposit Act. 11-0600

10191/1975

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventors : Harald BECK et al.
Serial No. : 09/965,776
Filed : September 27, 2001
For : METHOD AND DEVICE FOR CONTROLLING A
WHEEL BRAKE OF A MOTOR VEHICLE
3412 Examiner : Robert SICONOLFI
Art Unit : 3683
Confirmation No. : 3434

Mail Stop AF
Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

I hereby certify that this correspondence is being deposited
with the United States Postal Service with sufficient postage
as first class mail in an envelope addressed to:
Mail Stop AF, Commissioner for Patents, P.O. Box 1450,
Alexandria, VA 22313-1450 on 2/10/04

Signature: Matthew E. King

NOTICE OF APPEAL

Applicants hereby appeal to the Board of Patent Appeals and Interferences from the decision of the Examiner made in the Final Office Action dated October 10, 2003 finally rejecting claims 1, 3, 5, 7, 8 and 10.

Applicants request a one-month extension of time to respond to the Final Office Action mailed October 10, 2003, resetting the response date to February 10, 2004. The extension fee of \$110.00 should be charged to the deposit account of Kenyon & Kenyon, Deposit Account No. 11-0600.

The Commissioner is hereby authorized to charge payment of the 37 C.F.R. 1.191 Notice of Appeal fee of \$330.00 to the deposit account of Kenyon & Kenyon, Deposit Account No. 11-0600. Any additional fees deemed necessary should also be charged to Kenyon & Kenyon, Deposit Account No. 11-0600. Two additional copies of this Notice are enclosed for that purpose.

Respectfully submitted,

Richard L. Mayer

Date: 2/10/04

By: Mary C. Werner Reg No. 30,333
Richard L. Mayer (Reg. No. 22,490)

KENYON & KENYON
One Broadway
New York, New York 10004
212 425-7200
CUSTOMER NO. 26646

Exhibit C

RECEIVED

NOV 5 2004

GROUP 3600

Case No. 10191/1975
Ser. No. 09/965776

Atty. mmc
Due Date 5/11/04

The Impressed Mail Room date stamp acknowledges receipt of the date indicated of:

- ☐ Application
- ☐ Amendment
- ☐ Assignment
- ☐ Notice of Appeal
- ☐ Prior Art Statement
- ☒ Appeal Brief

☒ Extension Request


☐ Priority Document

☐ Issue Fee

☐ Declaration

☐ Small Entity

☒ Dep acct #110600




triplicate
copies

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
BOARD OF PATENT APPEALS AND INTERFERENCES

-----X
In re Application of: : Examiner: Robert SICONOLFI
:
Harald BECK et al. :
:
For: METHOD AND DEVICE FOR :
CONTROLLING A WHEEL :
BRAKE OF A VEHICLE :
:
Filed: September 27, 2001 :
: Art Unit 3683
Serial No.: 09/965,776 :
-----X

Mail Stop Appeal Brief - Patents
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

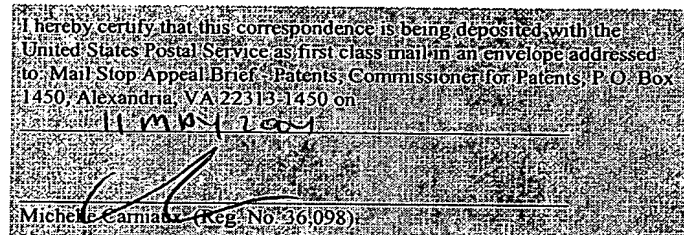

APPEAL BRIEF TRANSMITTAL

SIR:

Transmitted herewith for filing in the above-identified patent application, please find an Appeal Brief pursuant to 37 C.F.R. § 1.192(a), in triplicate.

Please charge the Appeal Brief fee of \$330.00, and any other fees that may be required in connection with this communication to the deposit account of **Kenyon & Kenyon**, deposit account number **11-0600**.

Appellants hereby request a one-month extension of time for submitting the Appeal Brief. The extended period for submitting the Appeal Brief expires on May 12, 2004. Please charge the \$110.00 extension fee and any other fee that may be required to Deposit Account No. 11-0600. A duplicate of this Transmittal is enclosed

Respectfully submitted, *(Res. No. 36098)*

Dated: 11 May 2001

By: *[Signature]*

Richard L. Mayer
Registration No. 22,490
KENYON & KENYON
One Broadway
New York, NY 10004
(212) 425-7200
CUSTOMER NO. 26646

[10191/1975]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
BOARD OF PATENT APPEALS AND INTERFERENCES

-----X
In re Application of: : Examiner: Robert SICONOLFI
:
Harald BECK et al. :
:
:
For: METHOD AND DEVICE FOR :
CONTROLLING A WHEEL :
BRAKE OF A VEHICLE :
:
Filed: September 27, 2001 :
: Art Unit 3683
:
Serial No.: 09/965,776 :
:
-----X

Mail Stop Appeal Brief - Patents
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

I hereby certify that this correspondence is being deposited with the
United States Postal Service with sufficient postage as first class
mail in an envelope addressed to: Mail Stop Appeal Brief - Patents,
Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia
22313-1450 on:

Date: 11 MAY 2004

Signature: 
Michelle Carniaux (Reg. No. 36,098)

APPEAL BRIEF PURSUANT TO 37 C.F.R. § 1.192(a)

S I R:

In the above-identified patent application ("the present application"), the Appellant mailed a Notice of Appeal on February 10, 2004 from the Final Office Action issued by the United States Patent and Trademark Office on October 10, 2003. This Notice of Appeal was received by the Patent Office on February 12, 2004.

In the Final Office Action, claims 1, 3, 5, 7, 8 and 10 were finally rejected. An Advisory Action was mailed on January 7, 2004.

In accordance with 37 C.F.R. § 1.192(a), this Appeal Brief is submitted in triplicate in support of the appeal of the final rejection of claims 1, 3, 5, 7, 8 and

10. For the reasons more fully set forth below, the final rejection of claims 1, 3, 5, 7, 8 and 10 should be reversed.

1. REAL PARTY IN INTEREST

The real party in interest in the present appeal is Robert Bosch GmbH, Stuttgart, Federal Republic of Germany. Robert Bosch GmbH is the assignee of the entire right, title, and interest in the above-identified application.

2. RELATED APPEALS AND INTERFERENCES

There are no other appeals or interferences "which will directly affect or be directly affected by or have a bearing on the Board's decision in the pending appeal."

3. STATUS OF CLAIMS

Claims 2, 4, 6 and 9 have been canceled.

Claims 1, 3, 5, 7, 8 and 10 stand finally rejected under 35 U.S.C. § 102(b) as anticipated by U.S. Patent No. 6,053,584 to Schunck et al. ("Schunck").

Claims 1, 3, 5, 7, 8 and 10 also stand finally rejected under 35 U.S.C. § 102(e) as anticipated by U.S. Patent No. 6,332,654 to Yano ("Yano").

A copy of the appealed claims is attached hereto in the Appendix.

4. STATUS OF AMENDMENTS

In response to the Final Office Action issued on October 10, 2003, a Request For Reconsideration under 37 C.F.R. § 1.116 was filed on December 4, 2003. No proposed amendments to the claims were presented in the Request For Reconsideration.

5. SUMMARY OF THE INVENTION

The present invention relates to a method and a device for controlling a wheel brake of a vehicle. Specification, page 1, lines 2 to 3.

According to the present invention, when the vehicle is standing still, a braking force may be limited to levels that keep the vehicle, having a certain weight, at a predefined gradient, so that the driver's stipulated intent (input) may be implemented only inasmuch as is technically practical. Specification, page 2, lines 32 to 37.

According to the present invention, the driver's stipulation may be taken into account if the driver wishes to remain at a standstill, for example, or would like to let the vehicle roll by releasing the brake pedal. However, brake application operations that are not technically feasible may be limited to a practical extent. Specification, page 3, lines 1 to 5. These measures may reduce loads in an advantageous manner, permitting design efficiency measures, such as, for example, a reduction in wall thickness of the hydraulic housing, a reduction in heat dissipation measures in the controller, a reduction or complete elimination of noise measures, and an adapted design of parts typically subject to wear. Specification, page 3, lines 7 to 12.

According to an example embodiment, if a determination is made that the vehicle is at a standstill (see Figure 2, step 152) these advantages may be obtained by limiting the braking force or brake pressure to a standstill limit value (PRADSOLLGRENZ) when the brake pressure derived from the driver's input (PRADSOLLFW) is greater than the standstill value limit. Specification, page 3, lines 14 to 15; Figure 2, step 156.

According to another example embodiment, pressure control on the wheels of a brake circuit may be performed by a single pressure regulator in an electrohydraulic brake system by using a controllable valve instead of controlling

the pressure on the individual wheels during certain driving situations. Specification, page 3, lines 17 to 21. If one of these operating situations prevails (see Figure 4, step 200), then the valve connecting the two pressure control circuits may no longer be actuated. Specification, page 13, lines 19-21; Figure 4, step 206. The valve opens so that the one pressure regulator (regulator i) may be deactivated (Figure 4, step 208), and according to step 210, control of both wheel brakes by the remaining pressure regulator (regulator j) may be performed in the manner described above. Specification, page 13, lines 21-25; Figure 4, step 210. In this manner, further pressure control circuits may then be deactivated which may lead to a reduction in the load on components, not only when the vehicle is standing still, but also during driving situations in which braking operations do not require individual wheel brake pressure control. Specification, page 3, lines 21 to 26.

According to another example embodiment, a maximum possible change in braking force or pressure is limited, which results in a reduction in load during driving operation as well as standstill operation. Specification, page 3, lines 28 to 30; Figure 2, steps 160, 166. During driving, this measure may be used for braking operations that do not require high braking force buildup dynamics such as, for example, slight pedal operations, low rates of change, and low driving speed. Specification, page 3, lines 31 to 34.

According to another example embodiment, large load reductions may be achieved by releasing the brakes for individual wheels completely at a standstill, at a low driving speed, and for a low desired braking force or change in braking force; the contributions of these brakes are compensated by the other wheels. Specification, page 3, line 36 to page 4, line 4.

According to another example embodiment, a build up of braking force is prevented in individual wheel brakes or in wheel brakes on one axle (e.g., rear wheels or front wheels) in such suitable braking situations. Specification, page 4, lines 4 to 7.

6. ISSUES

A. Whether claims 1, 3, 5, 7, 8 and 10 are anticipated by Schunck; and

B. Whether claims 1, 3, 5, 7, 8 and 10 are anticipated by Yano.

7. GROUPING OF CLAIMS

With respect to Issue A, claims 1, 3, 5, 7, 8 and 10 stand or fall together.

With respect to Issue B, claims 1, 3, 5, 6, 8 and 10 stand or fall together.

8. ARGUMENTS

A. Issue A; The Schunck reference does not anticipate the pending claims

Claims 1, 3, 5, 7, 8 and 10 stand finally rejected under 35 U.S.C. § 102(b) as anticipated by Schunck. Appellants respectfully submit that Schunck does not anticipate the present claims for the following reasons and respectfully submit that the present rejection should be reversed.

As regards the anticipation rejection of the claims, to reject a claim under 35 U.S.C. § 102, the Office must demonstrate that each and every claim feature is identically described or contained in a single prior art reference. (See Scripps Clinic & Research Foundation v. Genentech, Inc., 18 U.S.P.Q.2d 1001, 1010 (Fed. Cir. 1991)).

Furthermore, with regard to the claimed features, it is well established that "claims are not to be read in a vacuum, and limitations therein are to be interpreted in light of the specification in giving them their broadest reasonable interpretation." See In re Marosi, 710 F.2d 799 (Fed. Cir. 1983) (quoting In re Okuzawa, 537 F.2d 545, 548 (CCPA 1976)).

Independent claim 1 of the present invention relates to a method of controlling a wheel brake of a vehicle and recites, *inter alia*, the step of applying the at least one of the braking force and the braking pressure as a function of the desired braking input, wherein the applied at least one of the braking force and the braking pressure is limited to a maximal value when the vehicle is at a standstill.

The specification of the present invention sheds light on the meaning of this claim language where it clearly provides:

If it was found in step 152 that the vehicle is at a standstill, then a check may be performed in next step 156 to determine whether setpoint PRADSOLLFW, derived from the driver's desired braking, is greater than a predefined limit value PRADSOLLGRENZ, which represents the standstill limit pressure. If this is not the case, the brake pressure may be set as part of pressure regulation as in normal operation according to step 154. If the setpoint derived from the driver's intent (input) is greater than the limit value, then according to step 158, setpoint PRADSOLL to be set is reduced to the limit value, starting from setpoint PRADSOLLFW derived on the basis of the driver's intent (input), following a predefined time function $\Delta l(t)$.

(Specification, page 9, line 36 to page 10, line 11) (emphasis added). In light of one of the main objectives

of the present invention - to reduce unnecessary loading - this passage indicates that when an applied braking pressure (load) exceeds a limit value PRADSOLLGRENZ, that the pressure derived from the driver's intent is overridden in favor of a limit or maximal value to avoid application of forces that are greater than necessary to maintain the standstill condition of the vehicle.

The Schunck reference does not disclose this claimed feature. In contrast, the Schunck reference relates to a technique of reducing sudden changes in deceleration when coming to a standstill whereby a control system overrides a driver's braking commands and implements a progressive diminution in brake pressure so that the deceleration drops monotonously from an initial level to lower levels. See Schunck, col. 3, lines 28-35 (emphasis added). As can be discerned, the Schunck reference does not mention or refer to a limit or maximal pressure and also does not pertain to a standstill condition as such, but rather, pertains to smoothing out a transition from braking to standstill, i.e., the deceleration of the vehicle to zero velocity.

In the Advisory Action, the Examiner states that "the setpoint which is calculated independent of the brake pedal box in box 208 is the pressure limit." Schunck describes this procedure that the Examiner is referring to (box 208) as follows:

If speed VREF is less than [a second speed threshold V0] this threshold, the individual setpoints for the wheels are determined in step 208 taking into account the modified braking force distribution BKVSS. The normal braking force distribution between the rear wheel brakes and front wheel brakes is changed in this case. This can also be accomplished by suitably selecting the time functions for the rear and front wheel brakes in step 200, which reduce the front wheel brake pressures

differently from the rear wheel brake pressures.

(Schunck, col. 3, line 66 to col. 4, line 8).

Whether or not the threshold condition $V_{REF} < V_0$ is equivalent for testing for a standstill condition as the Examiner alleges (see Final Office Action, paragraph 5) -- which is not admitted -- there remains no disclosure of a standstill limit pressure. Instead, Schunck merely indicates that "pressures are selected so that deceleration drops monotonously from the initial level to lower levels." Schunck, col. 3, lines 34-35. Thus, while the claimed invention seeks to limit an absolute pressure that can be applied during a standstill so as to avoid unnecessary loading, i.e., the pressure itself is the targeted variable, in Schunck, the pressure chosen is secondary since the rate of deceleration is the targeted variable.

For these reasons, it is not understood how the Examiner maintains that Schunck discloses limiting the applied braking force or braking pressure to a maximal value when the vehicle is at a standstill, as recited in claim 1.

As it is clear that Schunck does not identically disclose these features, it is submitted that Schunck does not anticipate claim 1 or claims 3, 5, 7 and 8, which depend from claim 1. Since independent claim 10 recites features analogous to those discussed above with respect to claim 1, it is submitted that claim 10 is also not anticipated by Schunck.

Reversal of the rejection of claims 1, 3, 5, 7, 8 and 10 under 35 U.S.C. § 102(b) based on the Schunck reference is, therefore, respectfully requested.

**B. Issue B; The Yano reference does not
anticipate the pending claims**

Claims 1, 3, 5, 7, 8 and 10 stand finally rejected under 35 U.S.C. § 102(e) as anticipated by Yano. Appellants respectfully submit that Yano does not anticipate the present claims for the following reasons and respectfully submit that the present rejection should be reversed.

To reject a claim under 35 U.S.C. § 102, the Office must demonstrate that each and every claim feature is identically described or contained in a single prior art reference. (See Scripps Clinic & Research Foundation v. Genentech, Inc., 18 U.S.P.Q.2d 1001, 1010 (Fed. Cir. 1991)). Furthermore, with regard to the claimed features, it is well established that "claims are not to be read in a vacuum, and limitations therein are to be interpreted in light of the specification in giving them their broadest reasonable interpretation." See In re Marosi, 710 F.2d 799 (Fed. Cir. 1983) (quoting In re Okuzawa, 537 F.2d 545, 548 (CCPA 1976)).

As noted above, independent claim 1 relates to a method of controlling a wheel brake of a vehicle and recites, *inter alia*, the step of applying the at least one of the braking force and the braking pressure as a function of the desired braking input, wherein the applied at least one of the braking force and the braking pressure is limited to a maximal value when the vehicle is at a standstill.

Yano relates to a grade-holding brake system used for maintaining a brake pressure and a stopped condition after release of the brake pedal. See e.g., Yano, Abstract. Yano describes the details of an embodiment of this system in Figs. 9, 10, 11 and 12 and the accompanying text (col. 9, line 50 to col. 12, line 7). With respect to Fig 12, item 1207 refers to a "pressure decreasing

operation". As indicated in Fig. 12, this pressure decreasing operation is performed when a Ycntrl flag is set, an absolute value of a ZdP parameter is not less than an XdP parameter, and the ZdP parameter is not greater than zero. The accompanying text explains that step 1207 involves several sub-steps shown in Fig. 13C which include: holding a cut-off valve in a closed position for a predetermined period of time (thereby maintaining the pressure at the wheel brake cylinders for a predetermined period of time, since by having the cut-off valve closed, fluid cannot flow back away from the wheel brakes; opening the cut-off valve, closing the pressure booster valve; and turning the pressure booster pump off. See Yano, col. 11, lines 25-32. In this manner, Yano states, "it is possible to appropriately compensate for the pressure deviation [between the actual and target pressure levels]".

Yano describes in an immediately preceding passage a converse pressure increasing process used when the actual pressure is lower than the target pressure in which the cut-off valve is similarly held closed for a predetermined period of time, but then the pressure booster valve is opened and the pressure booster pump is turned on for a predetermined period of time. Yano, col. 11, lines 9-15. With respect to this latter process, it is stated that "if the predetermined periods of time for controlling the pressure booster valve and . . . pump are set at values corresponding to the pressure deviation ZdP, it is possible to appropriately compensate for the pressure deviation." Yano, col. 11, lines 16-20.

In the Advisory Action, the Examiner explains his reasoning as to why he believes that the Yano reference anticipates the claimed subject matter as follows:

The Target value of Yano is an upper limit to the pressure applied. The pressure is being controlled as to not rise above that value and therefore, the

target value can be construed as an upper limit. Furthermore, the argument that Yano teaches an adjustment method rather than a limit method is irrelevant

(Advisory Action, paragraph 5).

It is submitted that the Examiner's analysis is incorrect, and in fact, takes an overbroad view that reads limitations completely out of the claims. The fact that Yano prescribes a target pressure, in general, does not mean that it discloses limiting an applied braking force or braking pressure to a maximal value when the vehicle is at a standstill, particularly when Yano describes an opposite procedure of "increasing the pressure within each wheel cylinder 6 when the brake pedal is depressed and when the vehicle is stopped, and the pressure within each wheel cylinder 6 is set at a sufficient level to keep the vehicle stopped." Yano, col. 11, lines 60-67. With regard to this process, Yano specifically states that if Zdp (the difference between a target wheel cylinder pressure and a current wheel cylinder pressure) is greater than zero, i.e., if the target pressure is higher than the current pressure, the pressure is increased to the target level. Yano, col. 11, lines 1-5.

Clearly then, the target pressure level does not function as a ceiling or upper limit pressure level as recited ("braking pressure is limited to a maximal value"), since if the current pressure is below this level, it is increased to the target level. A reasonable interpretation of the claim language "limited to a maximal value" is that this means that the pressure is limited to prevent it from going above this level.

In this regard, while it is understood that limitations are not imported into the claims from the specification of which they are a part, the clear guidance

within the specification of the present invention that "if [the brake pressure is not above the limit standstill level] the brake pressure may be set as part of pressure regulation as in normal operation according to step 154, [while] if the setpoint derived from the driver's intent (input) is greater than the limit value, then according to step 158, setpoint PRADSOLL to be set is reduced to the limit value," clarifies that the setting of the maximal level establishes a ceiling level rather than a target level. Therefore, it is submitted that the Examiner is incorrectly equating the "target level" of Yano with the "maximal level" as claimed, and that Yano does not anticipate the subject matter of claim 1.

As claims 3, 5, 7 and 8 depend from claim 1, they are equally not anticipated by Yano. Since independent claim 10 recites features analogous to those discussed above with respect to claim 1, it is submitted that claim 10 is also not anticipated by Yano.

Reversal of the rejection of claims 1, 3, 5, 7, 8 and 10 under 35 U.S.C. § 102(e) based on the Yano reference is, therefore, respectfully requested.

9. CONCLUSION

For at least the reasons indicated above, Appellants respectfully submit that the art of record does not disclose Appellants' invention as recited in the claims of the present application. Accordingly, it is respectfully submitted that the invention recited in the claims of the present application is new, non-obvious and useful.

Reversal of the Examiner's rejections of the claims is
therefore respectfully requested.

Respectfully submitted,

h. l. c. can 36096

Dated: 11 May 1971

By: _____

Richard L. Mayer
Reg. No. 22,490

KENYON & KENYON
One Broadway
New York, New York 10004
(212) 425-7200
CUSTOMER NO. 26646

APPENDIX

1. A method of controlling a wheel brake of a vehicle, an electrically operated actuator being assigned to the wheel brake and being drivable by an actuation signal as a function of a setpoint to generate at least one of a braking force and a braking pressure, the method comprising:

determining a desired braking input based on at least one of a brake pedal operation and at least one other control system; and

applying the at least one of the braking force and the braking pressure as a function of the desired braking input;

wherein the applied at least one of the braking force and the braking pressure is limited to a maximal value when the vehicle is at a standstill.

3. The method of claim 1, wherein at least one of the braking pressure and the braking force is limited to a predefined value when the vehicle is at a standstill.

5. The method of claim 1, further comprising increasing a limit value if the vehicle is detected going from a standstill to a rolling state.

7. The method of claim 1, wherein a valve connects a first and a second pressure control circuits, further comprising:

driving the valve in the at least one predefined operating situation to connect the first and the second pressure control circuits; and

regulating the pressure by one of the first and second pressure control circuits while another one of the first and the second pressure control circuits is at least one of deactivated and converted to a pressure holding mode.

8. The method of claim 1, wherein a limit value is based on at least one wheel brake not being braked.

10. A device for controlling a wheel brake, the device comprising:

a control unit to control at least one electrically operated actuator assigned to the wheel brake;

wherein:

the control unit is operable to control as a function of a desired braking derived from an operation of at least one of a brake pedal and at least one other control system, and converting at least one of a magnitude and a change of the operation into the actuation quantity; and

the control unit is operable to limit actuation of the at least one electrically operated actuator in at least one predefined operating situation, and the desired braking is limited to a maximal value in at least one of the magnitude of the desired braking and dynamics of the change of the desired braking;

wherein the at least one predefined operating situation includes the vehicle being at a standstill.